

The Elite Source of LED Architectural Lighting



**2015 QUICK GUIDE TO
 LED PRODUCTS SELECTION**

iFit LED RETROFIT	Architectural LED Downlight	LED Downlight	LED Under Cabinet
LED Retrofit	LED Tape Light	LED Link/ Linia Cove	LED Track

RETROFIT

4 INCH 5 INCH 6 INCH 8 INCH

ARCHITECTURAL DOWNLIGHT

2 INCH 3 INCH 4 INCH 5 INCH 6 INCH 7 INCH 8 INCH 10 INCH



TEL: 1-323-888-1973 / 1-877-375-5555 • FAX: 1-323-888-1977 / 1-877-375-3333

The products shown in this catalog are covered by USA and international patents. / Specifications are subject to change without notice. / ELITE LIGHTING reserves the right to make any changes in the design, construction and listing approval of the products in this brochure required by law or by the rules of any regulatory body or at its discretion. / All information within this catalog is accurate at time of printing. / Dimensions and specifications are subject to change without prior notice. / Not responsible for any typographical error. / Wattage and specifications maybe different for products supplied in Canada.
 © Copyright 2014. Elite Lighting. All Rights Reserved. Patents Pending.

RECIPIENT HEREBY ACKNOWLEDGES THAT THIS BROCHURE IS AN EXTREMELY CONFIDENTIAL TRADE SECRET OF ELITE LIGHTING AND IT MAY NOT BE DISCLOSED TO ANY THIRD PARTY WHOMSOEVER WITHOUT FIRST OBTAINING THE PRIOR WRITTEN PERMISSION OF ELITE LIGHTING.
 LED FOLD OUT FLYER - Edition 7-MJ

the ELITE source of
SUSTAINABILITY

1% DIMMABLE ARCHITECTURAL LED DOWNLIGHT

- More Lumens than a 2x42W CFL Downlight
- Available in New Construction, Remodel, Retrofit & Architectural Cylinder
- 0-10V Dimming Standard, Lutron Hi-lume Available
- Available in Round & Square Apertures
- Color Temp: 27K, 30K, 35K, 41K, 50K
- > 50,000 Hours/LM79 & LM80




I PLEDGE TO CONSERVE ENERGY!




Architectural High Lumen New Construction

4 INCH HH4-LED	5 INCH HH5-LED	900 LUMENS 15W	1200 LUMENS 20W	6 INCH HH6-LED	900 LUMENS 15W	1200 LUMENS 20W	2000 LUMENS 32W	3000 LUMENS 40W	4000 LUMENS 49W
8 INCH HH8-LED	10 INCH HH10-LED	900 LUMENS 15W	1200 LUMENS 20W	2000 LUMENS 32W	3000 LUMENS 40W	4000 LUMENS 49W	6000 LUMENS 80W	8000 LUMENS 100W	




Architectural New Construction

4 INCH HV4-LED	5 INCH HV5-LED	800 LUMENS 16W	1100 LUMENS 21W	1500 LUMENS 34W
6 INCH HV6-LED	7 INCH HV7-LED	800 LUMENS 16W	1100 LUMENS 21W	1500 LUMENS 34W




Architectural High Lumen Retrofit

4 INCH HHJ4-LED	5 INCH HHJ5-LED	900 LUMENS 15W	1200 LUMENS 20W	6 INCH HHJ6-LED	900 LUMENS 15W	1200 LUMENS 20W	2000 LUMENS 32W	3000 LUMENS 40W	4000 LUMENS 49W
8 INCH HHJ8-LED	10 INCH HHJ10-LED	900 LUMENS 15W	1200 LUMENS 20W	2000 LUMENS 32W	3000 LUMENS 40W	4000 LUMENS 49W	6000 LUMENS 80W	8000 LUMENS 100W	




Architectural Retrofit

4 INCH HVJ4-LED	5 INCH HVJ5-LED	800 LUMENS 16W	1100 LUMENS 21W	1500 LUMENS 34W
6 INCH HVJ6-LED	7 INCH HVJ7-LED	800 LUMENS 16W	1100 LUMENS 21W	1500 LUMENS 34W




Architectural High Lumen Remodel

4 INCH HHR4-LED	5 INCH HHR5-LED	900 LUMENS 15W	1200 LUMENS 20W	6 INCH HHR6-LED	900 LUMENS 15W	1200 LUMENS 20W	2000 LUMENS 32W	3000 LUMENS 40W	4000 LUMENS 49W
8 INCH HHR8-LED	10 INCH HHR10-LED	900 LUMENS 15W	1200 LUMENS 20W	2000 LUMENS 32W	3000 LUMENS 40W	4000 LUMENS 49W	6000 LUMENS 80W	8000 LUMENS 100W	





Architectural Remodel

4 INCH HVR4-LED	5 INCH HVR5-LED	800 LUMENS 16W	1100 LUMENS 21W	1500 LUMENS 34W
6 INCH HVR6-LED	7 INCH HVR7-LED	800 LUMENS 16W	1100 LUMENS 21W	1500 LUMENS 34W






ARCHITECTURAL SQUARE LED DOWNLIGHT

4 INCH EX4SQ-LED	6 INCH EX6SQ-LED	900 LUMENS 14W	1100 LUMENS 16W	900 LUMENS 16W	1100 LUMENS 21W	2000 LUMENS 40W
-------------------------------	-------------------------------	-----------------------------	------------------------------	-----------------------------	------------------------------	------------------------------

ARCHITECTURAL LED CYLINDER

6 INCH SCH6-LED	8 INCH SCH8-LED	800 LUMENS 16W	1100 LUMENS 21W	1500 LUMENS 34W	900 LUMENS 16W	1200 LUMENS 24W	2000 LUMENS 32W	3000 LUMENS 40W	4000 LUMENS 49W
------------------------------	------------------------------	-----------------------------	------------------------------	------------------------------	-----------------------------	------------------------------	------------------------------	------------------------------	------------------------------

Find these products at:

http://www.iuseeliteled.com/product_lines/led_architectural/3

the ELITE source of
SUSTAINABILITY

LED DOWNLIGHT

- Housing Type: New Construction IC/Non-IC, Remodel IC/Non-IC
- Dimmable
- Over 500 Trim Types & Color Combinations
- Greater light output than a 65W BR30 or 32W CFL light bulb
- Color Temp: 27K, 30K, 35K, 41K, 50K
- > 50,000 Hours/LM79 & LM80
- Available in a variety of baffle, reflector, lensed, shallow, adjustable and wall wash trims



I PLEDGE TO LIVE AN ECO-FRIENDLY LIFESTYLE!



2
INCH
B2-LED
450
LUMENS
10W



3
INCH
LED2-3
500
LUMENS
8W



4
INCH
LED2-4
600
LUMENS
11W



5 INCH B5IC-LED	IC		Non-IC	
	650 LUMENS 14W	900 LUMENS 18W	900 LUMENS 18W	1200 LUMENS 24W



6 INCH B6IC-LED	IC		Non-IC	
	650 LUMENS 14W	900 LUMENS 18W	1200 LUMENS 24W	2000 LUMENS 32W



Trim's Color Options:



Find these products at:
http://www.iuseeliteled.com/product_lines/led_recessed/5

the ELITE source of
SUSTAINABILITY

LED RETROFIT

- Fits in most 4", 5" & 6" incandescent housings
- Lowers energy costs by up to 75%
- Dimmable
- CRI: 85+, 90+
- Color Temp: 27K, 30K, 35K, 41K, 50K
- > 50,000 Hours/LM79 & LM80
- Greater light output than a 65W BR30 or 32W CFL light bulb



I PLEDGE TO REDUCE MY CARBON FOOTPRINT!




4
INCH
RL430



650
LUMENS
10W



W-WH White White
P-BK Black Black



BZ-BZ Bronze Bronze
CP-CP Copper Copper
SN-SN Satin Nickel



CL-WH Clear White
CL-CH Clear Chrome
SN-SN Satin Nickel



W-WH White White
SN-WH Satin White
RG-PB Gold Polish Brass

5
INCH
RL530



650 **900**
LUMENS LUMENS
12W 16W



BZ-BZ Bronze Bronze
CP-CP Copper Copper
MB-BK Black Black



CP-WH Copper White
MB-WH Back White
RG-WH Gold White

6
INCH
RL630



750 **900** **1200**
LUMENS LUMENS LUMENS
14W 16W 20W



Socket Bracket



Adjustable slots



Torsion Springs



EZ Connector

iFit
Your Budget
Your Application
Your Lifestyle
5"/6" Housing

5 & 6
INCH
RL625
750
LUMENS
14W

DIMMING: **TRIAC**
VOLTAGE: **120**
FINISH: **W-WH**



6
INCH
RL663
750
LUMENS
14W

DIMMING: **TRIAC**
VOLTAGE: **120**
FINISH: **W-WH**

LED RETROFIT

Lights Everything to Its True Pure Natural Color

- Fits in most 4", 5" & 6" shallow & regular incandescent housings
- Lowers energy costs by up to 75%
- Color Temp: 27K, 30K, 40K
- > 50,000 Hours/LM79 & LM80
- Dimmable
- Greater light output than a 18W CFL or 65W BR20
- Utilize industry standard V springs



I PLEDGE TO LOWER ENERGY COSTS!



5.6 INCH

RL628

960
LUMENS
15W

CRI: 90+
(Required for 2013 Title 24 Rating)
Color Temperature: 30K
Lifetime: 50,000 Hours
Finish: White



4 INCH

RL428

650
LUMENS
11W

CRI: 85+, 90+
(Required for 2013 Title 24 Rating)
Color Temperature: 30K
Lifetime: 50,000 Hours
Finish: White



5.6 INCH

RL670

1000
LUMENS
14W

CRI: 85+, 90+
(Required for 2013 Title 24 Rating)
Color Temperature: 27K,
30K, 40K
Lifetime: 50,000 Hours
Finish: White



Elite LED Link

SLIM PROFILE

GREAT PERFORMANCE.

- Maximized performance, specification grade, LED strip in custom anodized housing
- Available in pre-cut sections allowing field assembly to every 6 inches
- Engineered to eliminate 'dark zones'
- Dimmable on low voltage Magnetic Lutron dimmers
- Life rated at 50,000 hours
- Built-in circuitry protects against short circuits
- No UV • No IR • No mercury • No lead • No PC Bs • No Asbestos



I PLEDGE TO FIND ENERGY SAVING SOLUTIONS!



EUM-LED

24V

70 LUMENS	160 LUMENS	340 LUMENS	540 LUMENS	750 LUMENS
1.7W	3.3W	6.6W	9.9W	13.7W
6"	12"	24"	36"	48"

CCT: 30K, 41K & 51K
 EFFICACY: UP TO 55 LPW
 CRI: 80+
 DISTRIBUTION: VERY WIDE FLOOD 120°
 Height = 0.5"
 Width = 0.75"

Accessories

- EUM-LED-ACC-1 (Joins Two pieces of LED-LINKS & adds zero length)
- EUM-LED-ACC-2 (For flat surfaces)
- EUM-LED-ACC-3 (For mounting LED-LINKS at 55° in a corner)
- EUM-LED-ACC-4 (12" extension)
- EUM-LED-ACC-5 (24" extension)
- EUM-LED-ACC-6 (48" extension)
- EUM-LED-ACC-7 (14" power extension)
- EUM-LED-ACC-8 (24" power extension)
- EUM-LED-ACC-9 (2" extension)
- EUM-LED-ACC-10 (6" extension)
- EUM-LED-HW-12 (12" connector)
- EUM-LED-HW-24 (24" connector)
- EUM-LED-DRIVER-65W-24V (60W max extended power cord driver)
- EUM-LED-DRIVER-30W-24V (Plug In Driver 30W max)



DIMMABLE COMPACT LED DC 120V MAGNETIC DRIVERS

Approximate Sizes and Weight (FOR USE WITH MAGNETIC LOW VOLTAGE DIMMER)

PART#	Input(120V)	Output(24V)
EUM-DC-24-40-120	1@40 Watts	24V
EUM-DC-24-60-120	1@60 Watts	24V
EUM-DC-24-100-120	1@100 Watts	24V
EUM-DC-24-150-120	1@150 Watts	24V
EUM-DC-24-200-120	1@200 Watts	24V

DIMMABLE COMPACT LED DC 227V MAGNETIC DRIVERS

Approximate Sizes and Weight (FOR USE WITH 277V MAGNETIC LOW VOLTAGE DIMMER)

PART#	Input(277V)	Output(24V)	Depth	Height	Width
EUM-DC-24-40-277	1@40 Watts	24V	2-1/4"	5"	2"
EUM-DC-24-60-277	1@60 Watts	24V	2-1/4"	5"	2"
EUM-DC-24-100-277	1@100 Watts	24V	2-1/2"	6"	2-1/4"

Find these products at:
http://www.iuseeliteled.com/product_lines/led_link/23



Linia Cove

- Up to 60 lumen per watt
- At least 50,000 hours of operating life
- Consume as low as 1.8W
- the most powerful asymmetrical and unidirectional lamp for cove lighting
- Adjustable lamp head
- Available in 2700K and 4100K color temperature

SL3-LED

108 LUMENS
1.8W



LENS COVER (SL1-LC, SL2-LC)



MOUNTING CHANNEL (SL-MC)



Find these products at:
<http://www.iuseeliteled.com/products/sl3-led/463>

LED Tape

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's
- Available in Warm White 3000K, Cool White 6500K
- Low profile for discreet locations.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.



I PLEDGE TO LONG LIFE, ENERGY EFFICIENCY, LOW MAINTENANCE COST!




LB100-LED INDOOR LED TAPE LIGHT

12V Voltage **127** Lumens/Ft **1.5W** Watts/Ft **50,000** Life (hours) **16'** Maximum Continuous Run

CAT#.
 LB100-15F-RED
 LB100-15F-AMBER
 LB100-15F-65K
 LB100-15F-30K
 LB100-15F-GREEN
 LB100-15F-BLUE

COLOR
 ● RED
 ● AMBER
 ○ COOL WHITE
 ○ WARM WHITE
 ● GREEN
 ● BLUE




LB101-LED INDOOR LED TAPE LIGHT

12V Voltage **109** Lumens/Ft **4.4W** Watts/Ft **50,000** Life (hours) **RGB** LED Type **16'** Maximum Continuous Run

CAT#.
 LB101-15F-RGB

COLOR
 ● RED
 ● GREEN
 ● BLUE



LB102-LED INDOOR LED TAPE LIGHT

24V Voltage **127** Lumens/Ft **1.5W** Watts/Ft **50,000** Life (hours) **32'** Maximum Continuous Run

CAT#.
 LB102-30F-65K
 LB102-30F-30K

COLOR
 ○ COOL WHITE
 ○ WARM WHITE



LB103-LED HIGH LUMEN INDOOR LED TAPE LIGHT

12V Voltage **400** Lumens/Ft **4.4W** Watts/Ft **50,000** Life (hours) **16'** Maximum Continuous Run

CAT#.
 LB103-15F-65K
 LB103-15F-30K

COLOR
 ○ COOL WHITE
 ○ WARM WHITE



LB200-LED OUTDOOR LED TAPE LIGHT

12V Voltage **114** Lumens/Ft **3W** Watts/Ft **50,000** Life (hours) **Wet Location** **16'** Maximum Continuous Run

CAT#.
 LB200-15F-RED
 LB200-15F-AMBER
 LB200-15F-65K
 LB200-15F-30K
 LB200-15F-GREEN
 LB200-15F-BLUE

COLOR
 ● RED
 ● AMBER
 ○ COOL WHITE
 ○ WARM WHITE
 ● GREEN
 ● BLUE



LB201-LED OUTDOOR LED TAPE LIGHT

12V Voltage **98** Lumens/Ft **4.4W** Watts/Ft **50,000** Life (hours) **Wet Location** **RGB** LED Type **16'** Maximum Continuous Run

CAT#.
 LB201-15F-RGB

COLOR
 ● RED
 ● GREEN
 ● BLUE



DIMMABLE COMPACT LED DC 120V MAGNETIC DRIVERS

APPROXIMATE SIZES AND WEIGHT

TYPE	Input(120V)	Output	Depth	Height	Width
LB100-DC-12-40-120*	1@40 Watts	12V DC	2-3/4"	5"	2"
LB100-DC-12-60-120*	1@60 Watts	12V DC	2-1/2"	6"	2-3/4"
LB100-DC-12-100-120	1@100 Watts	12V DC	2-1/2"	6"	2-3/4"
LB100-DC-24-40-120*	1@40 Watts	24V DC	2-3/4"	5"	2"
LB100-DC-24-60-120*	1@60 Watts	24V DC	2-1/2"	6"	2-3/4"
LB100-DC-24-100-120	1@100 Watts	24V DC	2-1/2"	6"	2-3/4"

DIMMABLE COMPACT LED DC 277V MAGNETIC DRIVERS

APPROXIMATE SIZES AND WEIGHT

TYPE	Input(277V)	Output	Depth	Height	Width
LB100-DC-12-40-277	1@40 Watts	12V DC	2-3/4"	5"	2"
LB100-DC-12-60-277	1@60 Watts	12V DC	2-1/2"	6"	2-3/4"
LB100-DC-12-100-277	1@100 Watts	12V DC	2-1/2"	6"	2-3/4"
LB100-DC-24-40-277	1@40 Watts	24V DC	2-3/4"	5"	2"
LB100-DC-24-60-277	1@60 Watts	24V DC	2-1/2"	6"	2-3/4"
LB100-DC-24-100-277	1@100 Watts	24V DC	2-1/2"	6"	2-3/4"



Coupling



Power Connector



Interconnector



Remote Controller



RGB amplifier




Driver



Magnetic Driver

Mini Channel Mounting System

LB100-BC-AL (Aluminium- Base Channel)
 LB100-BC-WH (White- Base Channel)
 LB100-BC-CL (Clear- Base Channel)
 LB100-TC-CL (Clear- Top Cover)
 LB100-TC-CLF (Clear Frosted- Top Cover)
 LB100-TC-WH (White- Top Cover)
 LB100-TC-WF (White Frosted- Top Cover)




Dimensions
 Length: 50"
 Height: 1/2"
 Width: 3/4"

Under Cabinet

- Driver installed in the fixture
- Aluminum Extrusion body
- 120V, 60 Lumens per watt
- Plug-in or hard wire
- Frosted lens
- ETL listed
- 3000K led module is standard

- Aluminum body
- May be mounted recessed or surface (mounting ring supplied)
- Outside diameter is 2-5/8"
- 3W LED Warm White 180 lumens, 2700K Color Temperature
- Not Dimmable
- Puck light drivers
- Puck light kit replacement driver
- LED-HU-30-DR-9W (9W Driver/Up to 3 fixtures max)

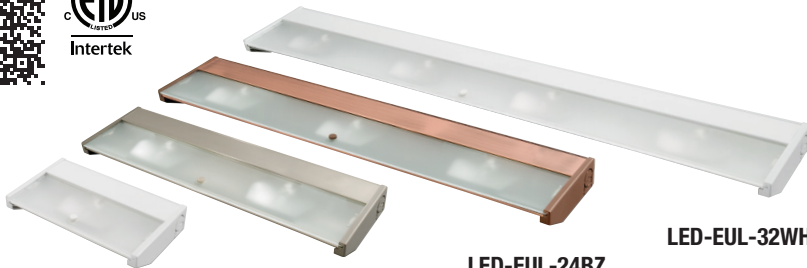

LED-EUL-8WH

LED-EUL-16SN

LED-EUL-24BZ

LED-EUL-32WH



LED-HU-30-3W

LED-HU-33-3W

FINISH

- SN- Satin Nickel
- PB- Polish Brass
- WH- White
- BK- Black
- CH- Chrome
- BZ- Bronze



LED-HU-02

LED-HU-03

LED-HU-08

- Die-cast aluminum body
- May be mounted recessed or surface (mounting ring supplied)
- Includes 12" wire leads and connector
- Ceiling opening is 2-1/8"
- 2W LED Warm White 100 lumens
- To be used with 12V transformers
- For dimming use magnetic 12V transformer with magnetic low voltage dimmer (BP50)
- Available in Satine Nickel, Polish Brass, White, Black, Chrome and Copper

Find these products at:
http://www.iuseeliteled.com/product_lines/led_undercabinet/22

Track

- Up to 2000 lumen output with 3000K CCT
- At least 50,000 hours of operating life
- Consume as low as 10W
- Dimmable option available to 15% with Electronic Low Voltage dimmer
- Heat and Ultra Violet-free illumination



Dimmable

GE INFUSION™ LED MODULE

ET-LED-373

1000 1500
LUMENS LUMENS
17W 26W

- CRI: 80+, 90+
- Color Temperature: 27K, 30K, 40K
- Optics: NS (Narrow), FL (Flood), WFL (Wide Flood), VWFL (Very Wide Flood)
- Finish: White, Black

ET-LED-374 Dimmable

600 900 1200 2000
LUMENS LUMENS LUMENS LUMENS
14W 16W 24W 34W

- Color Temperature: 27K, 30K, 35K, 41K, 50K
- Optics: SP, (15°), NFL (36°)
- Finish: White, Black

ET-LED-372 Dimmable

600 900 1200
LUMENS LUMENS LUMENS
14W 16W 24W

- Color Temperature: 27K, 30K, 35K, 41K, 50K
- Finish: White, Black

ET-LED-401

400
LUMENS
10W

- Color Temperature: 41K
- Finish: White, Black

Find these products at:
http://www.iuseeliteled.com/product_lines/led_track_light/32